

SPEED QUEEN | PROFESSIONAL

Industrial Tumble Dryer



SDR250
11 kg

SDR285
13 kg

SDR345
16 kg

Dryers features

- Standard stainless steel drum with large diameter
- Easy-to-use microprocessor (ECT)
- Combination of radial and axial airflow
 - maximal heat transfer
 - low energy consumption
 - short drying time
- Large door opening for easy loading and unloading
- Self cleaning lint screen

Dryers options

- Reverse drum
- Full control programmer
- Residual moisture control
 - safe drying of delicate linen
 - humidity detection in %
 - Ideal for dry cleaners, fire departments
 - available on Easy and Flex Control
- Stainless steel front



Fast cycles



Large Door Opening



Easy Operation



Low Energy Consumption




Standard Stainless Steel Drum

Dryer

Specifications

		SDR250	SDR285	SDR345
CAPACITY	kg	11	13	16
DIAMETER	mm		Ø760	
VOLUME	l	250	285	345
AIRFLOW	m ³ /h	520	550	600
DRYING AVERAGE	l/min	0,166 (EL) / 0,187 (G)	0,206 (EL) / 0,223 (G)	0,260 (EL) / 0,270 (G)
GAS CONNECTION	IN		3/4"	
ELECTRICAL CONNECTION - GAS HEAT			1x 208-240V 50Hz 3x 208-240V 50Hz 3x 380-415V +N 50Hz 3x 380-415V 50Hz 3x 440V 60Hz 3x 480V 50Hz 3x 480V 60Hz	
GAS OUTPUT	kW	16,5	19,5	25
ELECTRIC CONNECTION - ELECTRIC HEAT			3x 208-240V 50Hz 3x 380-415V 50Hz 3x 440V 60Hz 3x 480V 60Hz	
ENERGY	kW	13,5	18,0	24,0
STEAM CONNECTION	npt		3/4"	
ELECTRIC CONNECTION - STEAM HEATING		3x220-240V 50Hz, 1x220-240V 50Hz, 3x380-415V 50Hz	3x220-240V 50Hz, 1x220-240V, 3x380-415V 50Hz	1x 208-240V 50Hz 3x 208-240V 50Hz 3x 380-415V 50Hz 3x 440V 650Hz 3x 480V 50Hz 3x 480V 60Hz
STEAM OUTPUT	kW	16,6-19,4 / 20,0-23,3	25,5-29,9 / 21,5-24,0	25,5-35,6 / 24,8-27,7
STEAM PRESSURE	BAR		3-6/7-10	
FAN	kW		0,55	
DRIVE	kW		0,25	
EASY CONTROL			standard	
FLEX CONTROL			available	
H×W×D	mm	1680 x 795 x 1070	1680 x 795 x 1160	1680 x 795 x 1280
NET WEIGHT	kg	225	225	240
PACKED H×W×D	mm	1785 x 855 x 1100	1785 x 855 x 1190	1785 x 855 x 1310
GROSS WEIGHT	kg	245	250	260

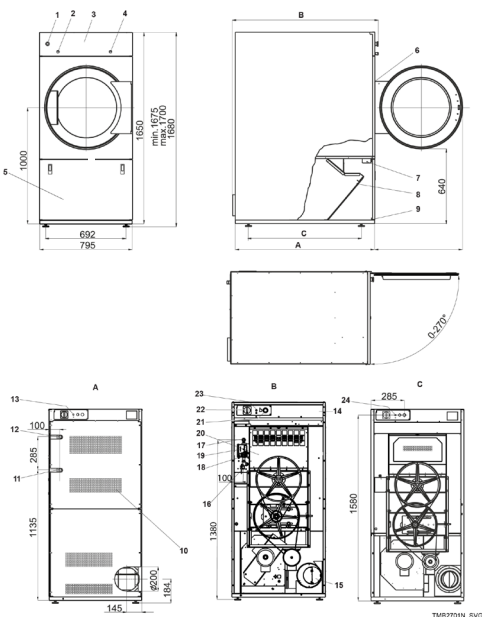

1. Programmer
2. Lock of the control panel
3. Emergency stop button (not applicable for version with coin meter)
4. Lint screen cover
5. Door lock microswitch
6. Lint cover microswitch
7. Lint screen
8. Name plate
9. Main switch
10. Main power supply
11. Heating chamber
12. Gas valve (G models only)
13. Pressure regulator (G models only)
14. Gas supply (G models only)
15. Airflow switch
16. Suction
17. Exhaust piping
18. Steam supply
19. Condense drain