

## ON-PREMISES LAUNDRY

### Softmount Washer-Extractors

20 lb Washer-Extractor

40 lb Washer-Extractor

90 lb Washer-Extractor

25 lb Washer-Extractor

55 lb Washer-Extractor

125 lb Washer-Extractor

30 lb Washer-Extractor

70 lb Washer-Extractor

 **Speed Queen.**



# BUILT FOR **RELIABLE** PERFORMANCE.

100 years. It's a long time for any company to be at the forefront of an industry. And you'd think that a company that's been able to lead for that long must have a finely honed craft — a premier product. Well, you'd be right. For more than a century, Speed Queen has built a legacy on providing equipment that stands up to any commercial laundry challenge. We make no compromises in performance. We refuse to be outdone in reliability and efficiency. Our commitment to quality is only matched by our commitment to your success. The result? The most profitable machines in the industry — bar none.



Some of our competitors may think that a residential machine wrapped in a rugged exterior passes for commercial grade. We believe that strength comes from within. Speed Queen machines are built specifically for the commercial environment. We use metal where others use plastic. Our world-class Test Lab rigorously pushes our products far beyond the conditions they'll face in the field. We believe in being there when our customers need us most. And we go the extra mile at every point of our manufacturing process to ensure that our machines reflect that belief.

For commercial laundry equipment designed for use in fire departments, health care facilities, hotels, correctional facilities, spas, salons, athletic organizations or other industry applications, you can rely on the proven performance of Speed Queen to make your life simpler and more productive.

# DEDICATED TO A HIGHER STANDARD.

The powerful operation of a washer-extractor often requires that the machine be bolted to the floor. Softmount washer-extractors offer an alternative for specialized applications, such as second floors, where hardmount units aren't an option. The heavy duty suspension absorbs vibrations without the need for special foundations, and our stainless steel construction increases overall strength and durability. The inverter drive system delivers low energy use, high extraction speed, lower noise and fewer imbalances. The 20 to 70 lb capacities offer an attractive sleek, modern design with a slanted control panel for ease of operation.

## HIGH EXTRACT SPEEDS

Up to 400 G-Force greatly reduces drying time and increases throughput.

## INVERTER DRIVE

Handles a wide variety of fabric types, while ensuring superior linen care.

## STAINLESS STEEL CONSTRUCTION

Front, top and reinforced side panels, and inner drum and tub.



## UPFRONT SOAP BOX

For ease of access and use.

## LARGE DOOR OPENING


For easy loading and unloading.

## FLEXIBLE INSTALLATION

Freestanding designs install quickly with same day operation.

## QED SELECT OPL CONTROL

QED Select control comes with 99 preset programs and multi-language capability. Versatile and easy to use, the customizable wash programs help managers tailor their wash process for specific loads and linen types. User can easily follow the status of every phase of the wash cycle and modify data and parameters at any time to monitor for maximum efficiency. The result? Your laundry receives the best possible care because operators have the utmost cycle control.

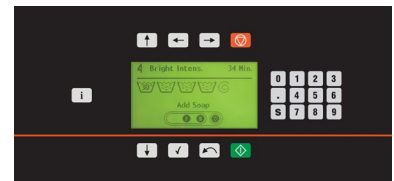

# SOFTMOUNT WASHER-EXTRACTOR SPECIFICATIONS

Models		SY20	SY25	SY30	SY40	SY55	SY70	SY90	SY125
<b>Control</b>		QED Select	QED Select	QED Select	QED Select	QED Select	QED Select	QED Select	QED Select
<b>Capacity - lb (kg)</b>		20 (8)	25 (11)	30 (14)	40 (18)	55 (24)	70 (31)	90 (40)	125* (55)
<b>Overall Width - in (mm)</b>		27.95 (710)	31.29 (795)	31.29 (795)	38.18 (970)	38.18 (970)	38.18 (970)	47.04 (1195)	47.04 (1195)
<b>Overall Depth - in (mm)</b>		31.1 (790)	31.29 (795)	37.2 (945)	38.18 (970)	43.5 (1105)	46.65 (1185)	56.3 (1430)	63.39 (1610)
<b>Overall Height - in (mm)</b>		43.89 (1115)	48.22 (1225)	48.22 (1225)	55.51 (1410)	55.51 (1410)	55.51 (1410)	75 (1905)	75 (1905)
<b>Cylinder Diameter - in (mm)</b>		20.87 (530)	24.40 (620)	24.4 (620)	29.53 (750)	29.53 (750)	29.53 (750)	36 (914)	36 (914)
<b>Cylinder Depth - in (mm)</b>		13.78 (350)	13.78 (350)	17.72 (450)	16.14 (410)	21.46 (545)	24.41 (620)	24 (610)	31.1 (790)
<b>Cylinder Volume - cu. ft. (liters)</b>		2.6 (75)	3.7 (105)	4.8 (135)	6.4 (180)	8.5 (240)	9.9 (280)	14.1 (400)	18.3 (518)
<b>Door Opening Size - in (mm)</b>		13 (330)	16.14 (410)	16.14 (410)	18.11 (460)	18.11 (460)	18.11 (460)	21.3 (540)	21.3 (540)
<b>Door Bottom to Floor - in (mm)</b>		13.74 (349)	13.46 (342)	13.46 (342)	18.77 (477)	18.77 (477)	18.77 (477)	28.74 (730)	28.74 (730)
<b>Wash Speed - RPM</b>		49	49	49	42	42	42	38	38
<b>Extract Speed - RPM</b>		1165	1075	1075	980	980	915	830	830
<b>Extract G-Force</b>		400	400	400	400	400	350	350	350
<b>Water Inlet Connection - in (mm)</b>		2 x 0.75 (19)	2 x 0.75 (19)	2 x 0.75 (19)	2 x 0.75 (19)	2 x 0.75 (19)	2 x 0.75 (19)	3 x 1 (25)	3 x 1 (25)
<b>Steam Inlet Connection - in (mm)</b>		0.5 (13)	0.5 (13)	0.5 (13)	0.5 (13)	0.5 (13)	0.5 (13)	0.75 (19)	0.75 (19)
<b>Drain Diameter - in (mm)</b>		3 (76)	3 (76)	3 (76)	3 (76)	3 (76)	3 (76)	2 x 3 (76)	2 x 3 (76)
<b>Motor Size - hp (kw)</b>		1.00 (.75)	1.48 (1.10)	2.01 (1.50)	2.95 (2.20)	4.02 (3.00)	4.02 (3.00)	10.06 (7.50)	10.06 (7.50)
<b>Voltage/ Circuit Breaker - FLA*</b>	No Heat								
	200-240/50/60/1/3	10-6.7 (1 Ph) 10-6.7 (3 Ph)	15-9.8 (1 Ph) 15-9.8 (3 Ph)	15-10.1 (1 Ph) 15-10.1 (3 Ph)	20-14.2 (1 Ph) 20-14.2 (3 Ph)	20-15 (1 Ph) 20-15 (3 Ph)	20-16 (1 Ph) 20-16 (3 Ph)	-	-
	200-240/50/60/3	-	-	-	-	-	-	40-25.4	40-28
	440-480/50/60/3	-	-	-	-	10-7.1	10-7.2	20-14.6	20-16
	Heat								
	200-240/50/60/3	-	-	-	-	-	-	120-105	160-147
440-480/50/60/3	-	-	-	-	-	-	63-58	100-79	
<b>Shipping Dimensions Approx. - in (mm)</b>	Width	29.53 (750)	32.87 (835)	32.87 (835)	40.35 (1025)	40.35 (1025)	40.35 (1025)	56.3 (1430)	56.3 (1430)
	Depth	33.01 (840)	33.01 (840)	38.78 (985)	39.96 (1015)	45.28 (1150)	48.23 (1225)	61.8 (1570)	68.9 (1750)
	Height	49.02 (1245)	52.95 (1345)	52.95 (1345)	61.02 (1550)	61.02 (1550)	61.02 (1550)	82.9 (2105)	82.9 (2105)
<b>Net Weight - lb (kg)</b>		408 (185)	463 (210)	563 (255)	838 (380)	948 (430)	1092 (495)	3439 (1560)	3594 (1630)
<b>Shipping Weight - lb (kg)</b>		441 (200)	518 (235)	606 (275)	871 (395)	992 (450)	1135 (515)	3748 (1700)	3902 (1770)
<b>Agency Approvals</b>		CSA	CSA	CSA	CSA	CSA	CSA	CSA	CSA

\* Circuit breaker and amp draw data shown are for models without electric heat. Consult factory for other configurations. Manufacturing strongly recommends using a circuit breaker instead of fuses.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. The quality management system of Alliance Laundry Systems' Czech facility has been registered to ISO 14001:2005 and 9001:2009. Printed in the USA.